

GENERAL NOTES:

1. REFER TO ASBESTOS ABATEMENT DWGS FOR RELATED WORK.

2. REFER TO MECHANICAL DWGS FOR RELATED MECHANICAL WORK.

3. REFER TO ELECTRICAL DWGS FOR RELATED ELECTRICAL WORK. 4. REFER TO FIRE PROTECTION DWGS FOR RELATED FIRE PROTECTION WORK.

5. DEMOLITION WASTE TO BE REMOVED VIA ENCLOSED WASTE CHUTE TO DUMPSTER.

6. REMOVE ALL EXISTING WINDOW COVERINGS AND FORWARD TO OWNER. 7. REMOVE ALL SIGNAGE IN AREAS OF DEMOLITION AND FORWARD TO OWNER.

8. REMOVE ALL PICTURES/ARTWORK, WALL MOUNTED SHELVES OR BENCHES FROM WALLS IN AREAS OF DEMOLITION AND FORWARD TO OWNER. 9. REMOVE ALL HANDRAILS IN AREAS OF DEMOLITION AND FORWARD TO OWNER.

10. REMOVE ALL VINYL CORNER GUARDS IN AREAS OF DEMOLITION AND FORWARD TO OWNER. 11. SOME PARTITIONS TO BE REMOVED ARE ORIGINAL TO THE BUILDING. FLOOR TOPPING WAS LIKELY APPLIED AFTER, SO FILLING OF TRENCHES AND LEVELING OF DIFFERENCES IN TOPPING

DEPTHS SHOULD BE ANTICIPATED IN THESE AREAS. 12. DISRUPTIVE ACTIVITIES IN OCCUPIED SPACES TO BE LIMITED AS DIRECTED BY COR. 13. EQUIPMENT AND FURNISHINGS RELOCATION BY VA.

DEMOLITION NOTES LEGEND:

1 REMOVE INTERIOR PARTITION.

/2 REMOVE DOOR, FRAME & HARDWARE.

 $\overline{/3}$ REMOVE WINDOW INCLUDING STORM WINDOW, SASH, INTERIOR SILL, STONE SILL & FRAME.

4 CUT OPENING IN MASONRY WALL FOR NEW DOOR.

 $\sqrt{5}$ INSTALL TEMPORARY CONSTRUCTION PARTITION. SEE SPECIFICATION SECTION 010000 FOR DESCRIPTION OF TYPICAL TEMPORARY CONSTRUCTION PARTITION; AND DESCRIPTION OF REQUIRED TEMPORARY CONSTRUCTION PARTITION AT SECOND FLOOR PSYCHIATRIC AREA.

EXISTING FINISH LEGEND

ACT - ACOUSTIC CEILING TILE CCB - COVED CONCRETE BASE CCB — COVED C CPT — CARPET

EPTT — EPOXY TERRAZZO GCMU – GLAZED CONCRETE MASONRY GWB – GYPSUM WALL BOARD P. – PAINT

PL – PLÄSTER VCT – VINYL COMPOSITE TILE VWC - VINYL WALL CLOTH


ACTION CODE 1. EXISTING FINISH REMAINS


2. EXISTING FINISH REMAINS - PATCH TO MATCH WHERE DAMAGED BY DEMOLITION.


REMOVE WALL FINISH ONLY. EXISTING PARTITION REMAINS. EXISTING PARTITION TO BE REMOVED AT


AREAS DESIGNATED AS DASHED LINES.

5. REMOVE EXISTING FINISH AS REQUIRED FOR REMODELING.



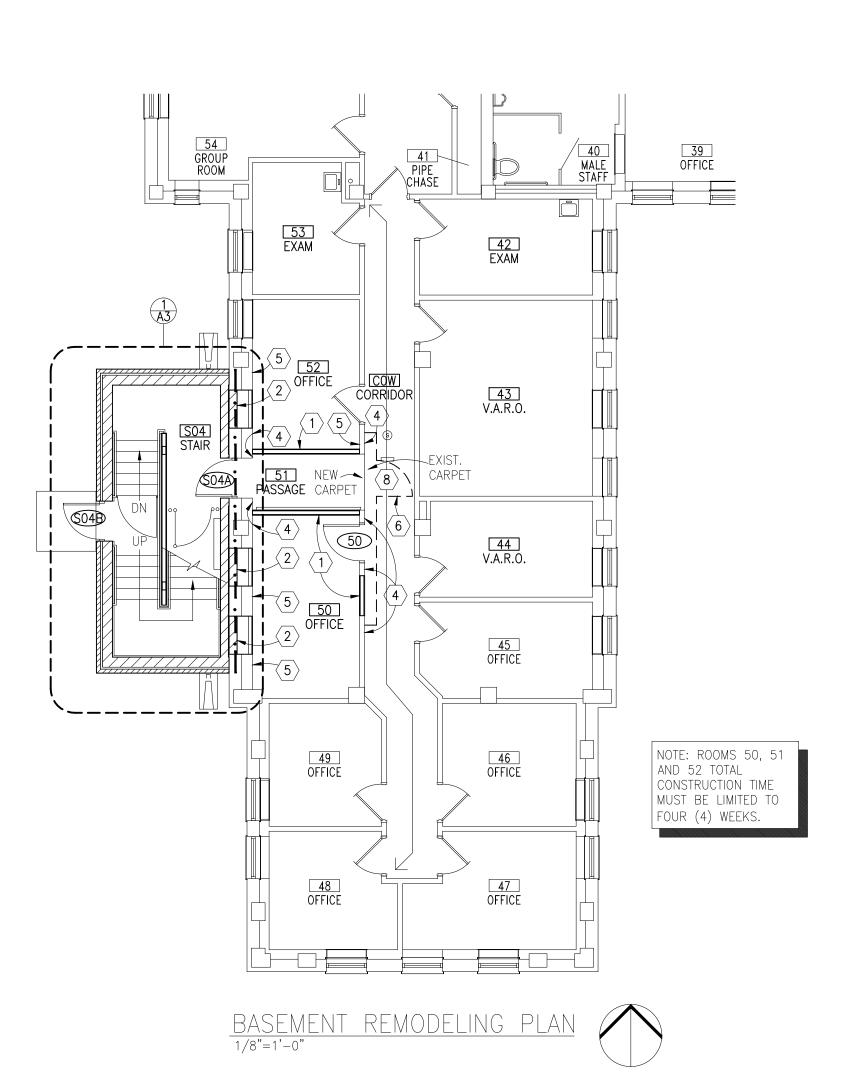

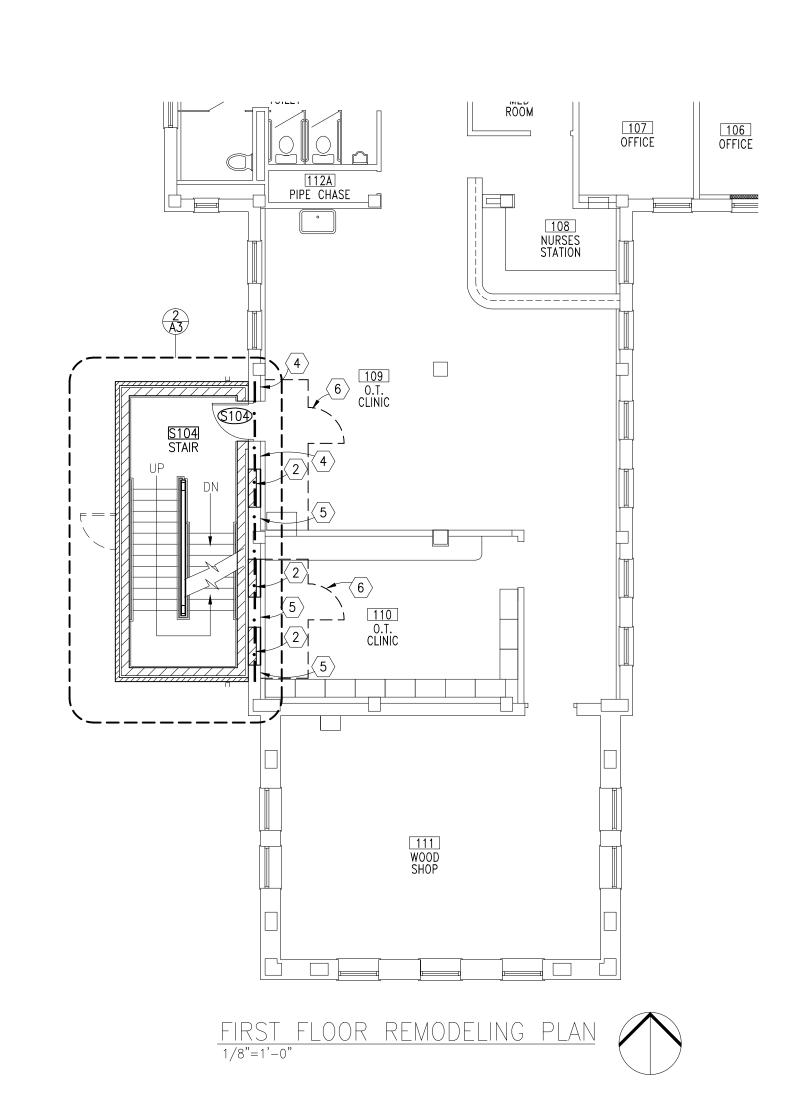

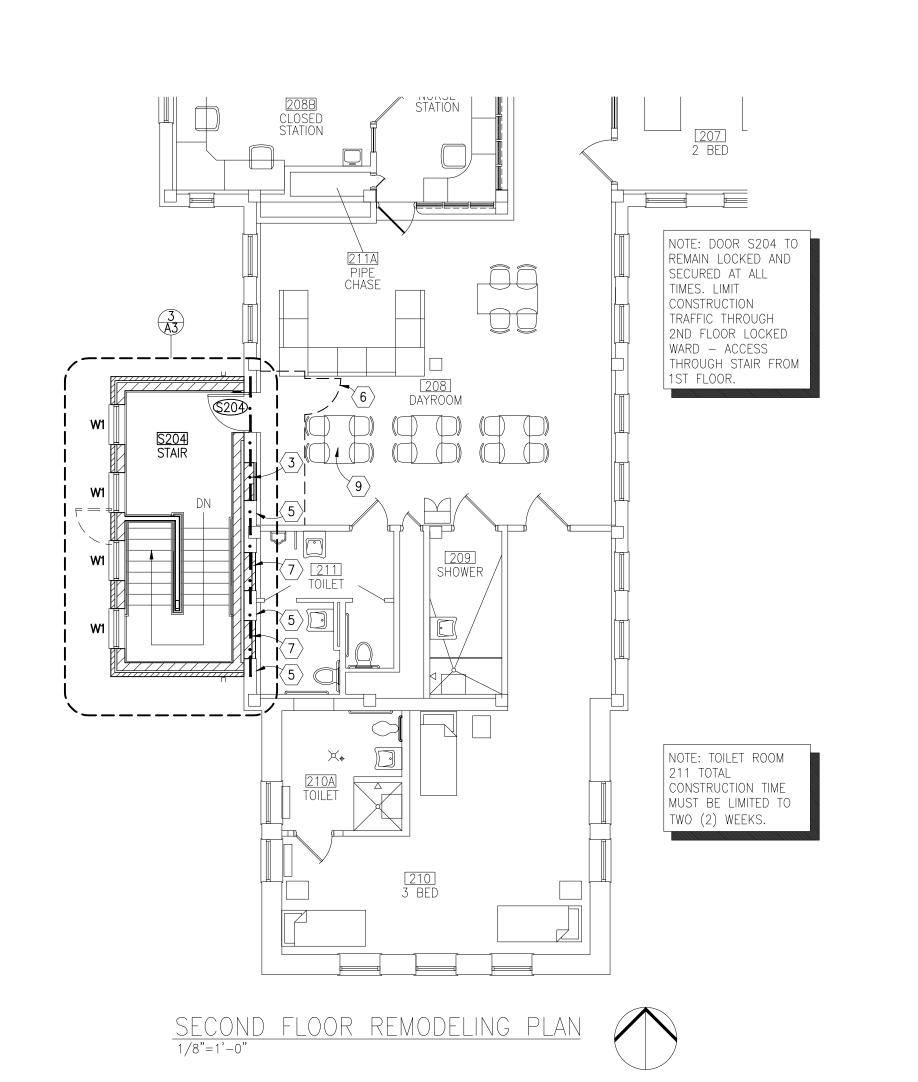

REMODELING NOTES LEGEND:

- $\langle 1 \rangle$ 5/8" Type 'X' gwb ea. side of 3 5/8" metal stud @ 16" o.c. with 2" sound ATTENUATION BLANKET IN CAVITY. EXTEND FROM FLOOR TO STRUCTURAL DECK ABOVE. PROVIDE ACOUSTICAL SEAL AT INTERSECTION WITH DECK OR WALLS AND DUCT, PIPE AND CONDUIT PENETRATIONS, TYPICAL.
- $\overline{\langle 2 \rangle}$ infill with 5/8" gwb on metal studs flush to match existing interior finish. PROVIDE CMU BACK UP. SEE DETAIL 2/A3.
- $\overline{\langle 3 \rangle}$ INFILL WITH TWO (2) LAYERS OF 5/8" ABUSE RESISTANT GWB ON METAL STUDS FLUSH TO MATCH EXISTING INTERIOR FINISH. PROVIDE CMU BACK UP. SEE DETAIL 3/A3.
- $\langle 4
 angle$ patch to match existing finish as required due to remodeling.
- $\langle 5 \rangle$ PATCH & PAINT WALL.
- $\langle 6
 angle$ remove temporary construction partition. Patch to match any damage to existing
- $\langle 7 \rangle$ INFILL WITH GLAZED CMU TO MATCH EXISTING. PROVIDE CMU BACKUP. SEE DETAIL 3/A3.
- 8 PREP AND SKIM COAT WEST WALL AT REMOVED VINYL WALL CLOTH, PROVIDE NEW PAINT FINISH, ALL FINISHED WORK TO BE COMPLETED DUST FREE WITHOUT CONSTRUCTION
- $raket{9}$ va to remove and store furnishings as required.

FIRE PROTECTION:

INSTALL FIRE PROTECTION PIPING AND SPRINKLER HEADS AS NECESSARY FOR NEW STAIR ADDITION. PROVIDE HEADS TO SPRINKLE BELOW CEILING AND LANDINGS AS REQUIRED, HEADS IN LAY-IN-TILE CEILING SHALL BE IN CENTER OF TILE. INSTALL PIPING AND HEADS AS PER LIGHT HAZARD CONSTRUCTION AND NFPA 13. REFER TO SPECIFICATION <u>DIVISION 21-FIRE SUPPRESSION</u> FOR ADDITIONAL REQUIREMENTS.


RATING LEGEND:

1 HOUR RATING




MOORHEAD, MN 56560


REVISION






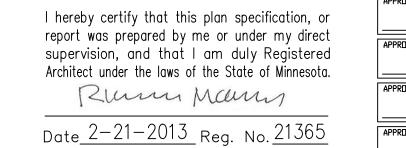


APPROVED:	SERVICE LINE DIRECTOR	DATE:	APPROVED:	INFECTION CONTROL NURSE	DATE:	DRAWING
						DEMOL:
APPROVED:	SERVICE LINE DIRECTOR	DATE:	APPROVED:	PATIENT SAFETY	DATE:	PLANS
APPROVED:	PROJECTS SECTION MANAGER	DATE:	APPROVED	CHIEF OF POLICE	DATE:	APPROVED:
APPROVED:	DIRECTOR FMS	DATE:	APPROVED:	SAFETY MANAGER	DATE:	APPROVED:
	APPRIIVED: APPRIIVED:	APPROVED: SERVICE LINE DIRECTOR APPROVED: SERVICE LINE DIRECTOR APPROVED: PROJECTS SECTION MANAGER APPROVED: DIRECTOR FMS	APPROVED: SERVICE LINE DIRECTOR DATE: APPROVED: PROJECTS SECTION MANAGER DATE:	APPROVED: SERVICE LINE DIRECTOR DATE: APPROVED: APPROVED: PROJECTS SECTION MANAGER DATE: APPROVED:	APPROVED: SERVICE LINE DIRECTOR DATE: APPROVED: PATIENT SAFETY APPROVED: PROJECTS SECTION MANAGER DATE: APPROVED: CHIEF OF POLICE	APPROVED: SERVICE LINE DIRECTOR DATE: APPROVED: PROJECTS SECTION MANAGER DATE: APPROVED: CHIEF OF POLICE DATE:

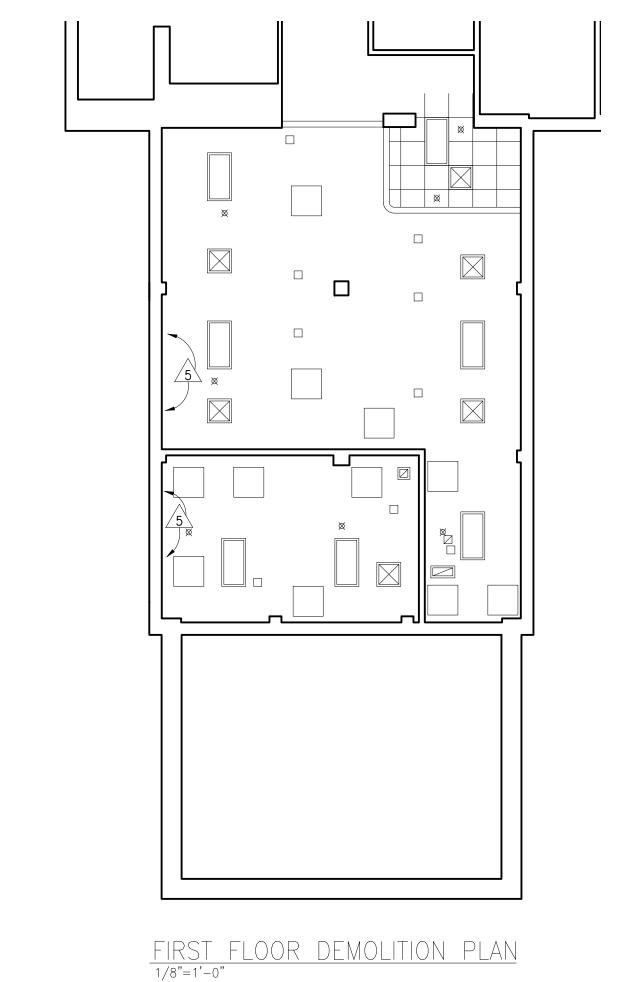


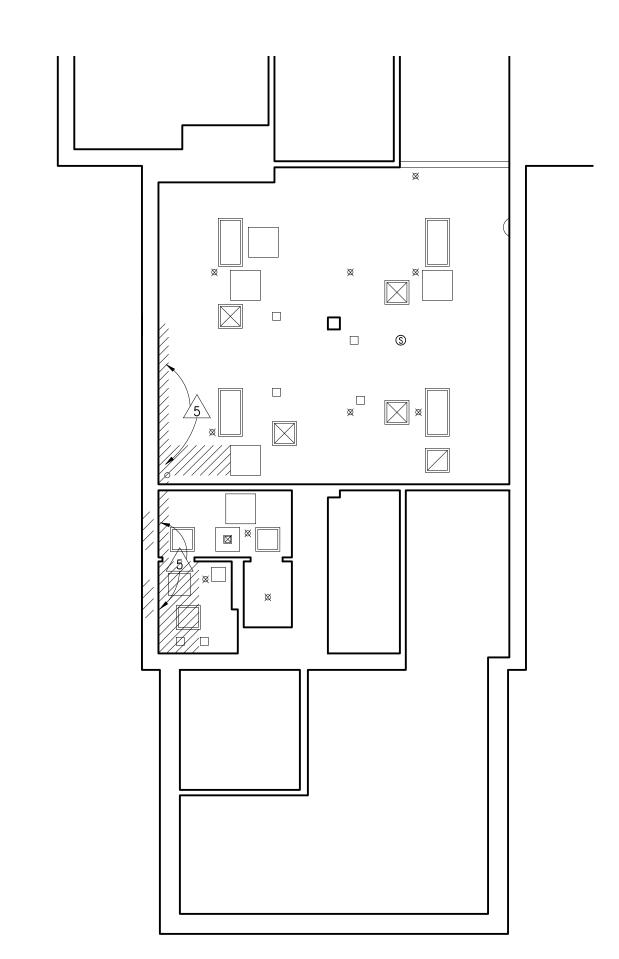




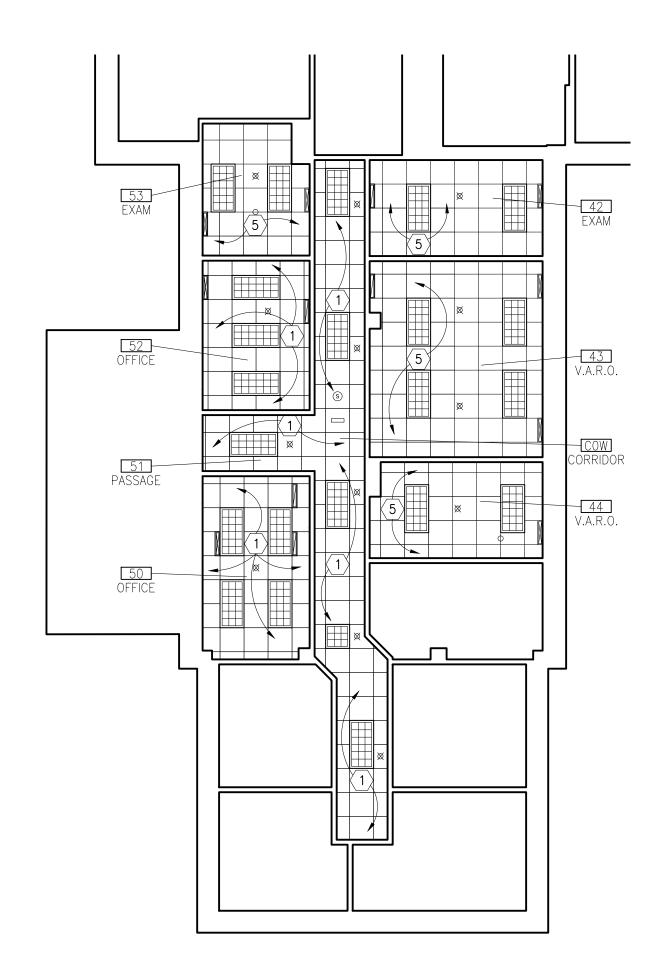

BASEMENT REMODELING PLAN (OPTION 2)
1/8"=1'-0"

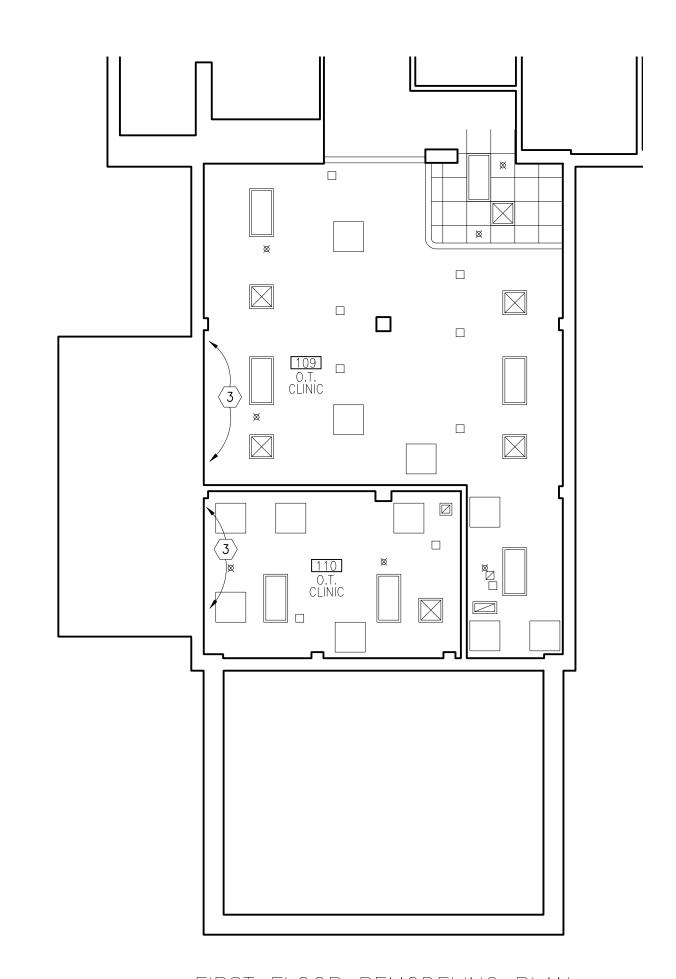

FIRST FLOOR REMODELING PLAN
1/8"=1'-0"

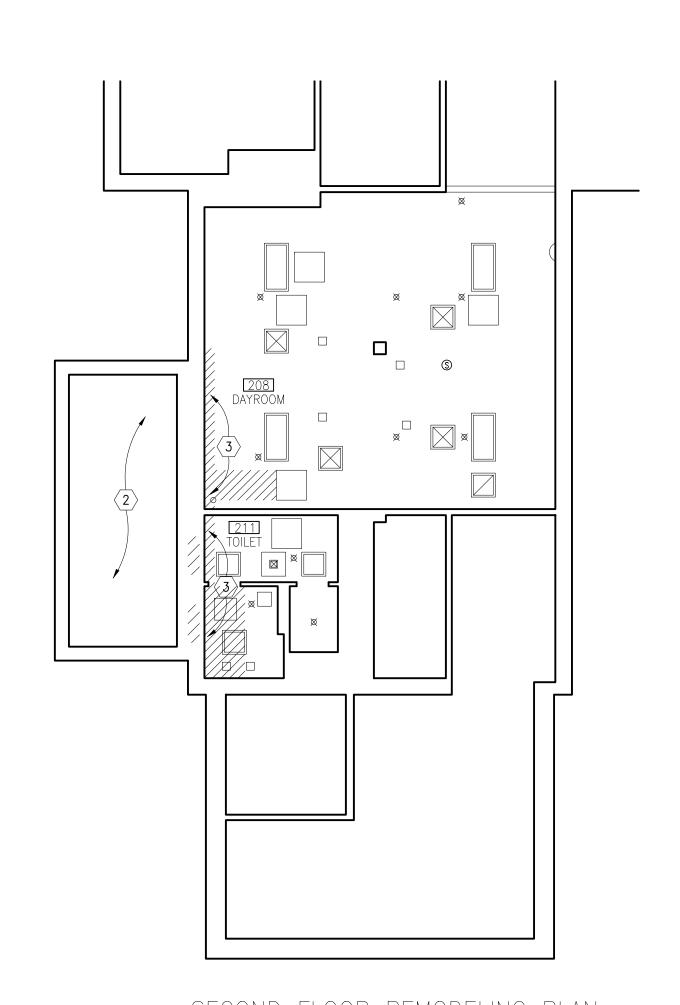

SECOND FLOOR REMODELING PLAN
1/8"=1'-0"

GENERAL NOTES:

1. REFER TO ASBESTOS ABATEMENT DWGS FOR RELATED WORK.

2. REFER TO MECHANICAL DWGS FOR RELATED MECHANICAL WORK. 3. REFER TO ELECTRICAL DWGS FOR RELATED ELECTRICAL WORK.

4. REFER TO FIRE PROTECTION DWGS FOR RELATED FIRE PROTECTION WORK. 5. DEMOLITION WASTE TO BE REMOVED VIA ENCLOSED WASTE CHUTE TO DUMPSTER.

6. REMOVE ALL EXISTING WINDOW COVERINGS AND FORWARD TO OWNER. 7. REMOVE ALL SIGNAGE IN AREAS OF DEMOLITION AND FORWARD TO OWNER.

8. REMOVE ALL PICTURES/ARTWORK, WALL MOUNTED SHELVES OR BENCHES FROM

WALLS IN AREAS OF DEMOLITION AND FORWARD TO OWNER.

9. REMOVE ALL HANDRAILS IN AREAS OF DEMOLITION AND FORWARD TO OWNER. 10. REMOVE ALL VINYL CORNER GUARDS IN AREAS OF DEMOLITION AND FORWARD TO

11. SOME PARTITIONS TO BE REMOVED ARE ORIGINAL TO THE BUILDING. FLOOR TOPPING WAS LIKELY APPLIED AFTER, SO FILLING OF TRENCHES AND LEVELING

OF DIFFERENCES IN TOPPING DEPTHS SHOULD BE ANTICIPATED IN THESE AREAS. 12. DISRUPTIVE ACTIVITIES IN OCCUPIED SPACES TO BE LIMITED AS DIRECTED BY

DEMOLITION PLAN NOTES:

/1 REMOVE ACOUSTIC CEILING TILE & GRID.

/2 REMOVE EXISTING FLUORESCENT LIGHT FIXTURE.

 $\sqrt{3}$ REMOVE CEILING AS REQUIRED FOR MECHANICAL WORK.

4 EXISTING CEILING REMAINS.

 $\sqrt{5}$ REMOVE CEILING AS REQUIRED FOR CONSTRUCTION.

<u>CEILING LEGEND:</u>

2'-0" x 2'-0" CEILING GRID. REINSTALL AT EXISTING HEIGHT ABOVE FINISHED FLOOR.

RECESSED FLUORESCENT LIGHT FIXTURE

RECESSED FLUORESCENT LIGHT FIXTURE

O DOWN LIGHT FIXTURE

SUPPLY GRILLE, CEILING DIFFUSER

RETURN AIR/EXHAUST GRILLE

SMOKE OR TEMPERATURE DETECTOR (SEE ELECTRICAL DRAWINGS)

S SPEAKER (SEE ELECTRICAL DRAWINGS)

EXIT (SEE ELECTRICAL DRAWINGS)

₩ SPRINKLER HEADS

— — CEILING DEMOLITION ///// MECHANICAL WORK LOCATION. VFY.

REMODELING PLAN NOTES:

1) NEW ACOUSTIC TILE & GRID. MATCH EXISTING WHERE OCCURS.

 $\langle 2 \rangle$ NEW GWB CEILING.

3 PATCH CEILING TO MATCH. PAINT ENTIRE CEILING TO MATCH EXISTING COLOR.

4 EXISTING CEILING REMAINS. PATCH TO MATCH WHERE DAMAGED BY CONSTRUCTION.


FEMOVE AND REINSTALL CEILING GRID AS REQUIRED TO ACCOMMODATE MECHANICAL WORK. INSTALL NEW CEILING TILE WHERE INDICATED.



REVISION






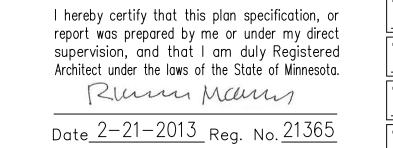

	APPROVED:	SERVICE LINE DIRECTOR	DATE:	APPROVED:	INFECTION CONTROL NURSE	DATE:	DRAWIN
r							REFL
t	APPROVED:	SERVICE LINE DIRECTOR	DATE:	APPROVED:	PATIENT SAFETY	DATE:	AND
d							
1.							
	APPROVED:	PROJECTS SECTION MANAGER	DATE:	APPROVED:	CHIEF OF POLICE	DATE:	APPROV
_							HITKUY
	APPROVED:	DIRECTOR FMS	DATE:	APPROVED:	SAFETY MANAGER	DATE:	
-							APPR0V
						l I	

DATE:	DRAWING TITLE		PRDJECT TITLE			
	REFLECTED CEILING DEMOLITION AND REMODELING PLANS	BUILDING 28 SOUTHWEST STAIR TOWER ADDITION				
DATE:	HIAD VEHIDDEFING I FHIAS					
DATE:						
	APPROVED: CHIEF OF STAFF	DATE:	BUILDING No 28	CHECKED BY RM	DRAWN M	
DATE:	APPROVED: MEDICAL CENTER DIRECTOR	DATE:	LOCATION VA MEDICAL CENTER ST.CLOUD, MN 56303			

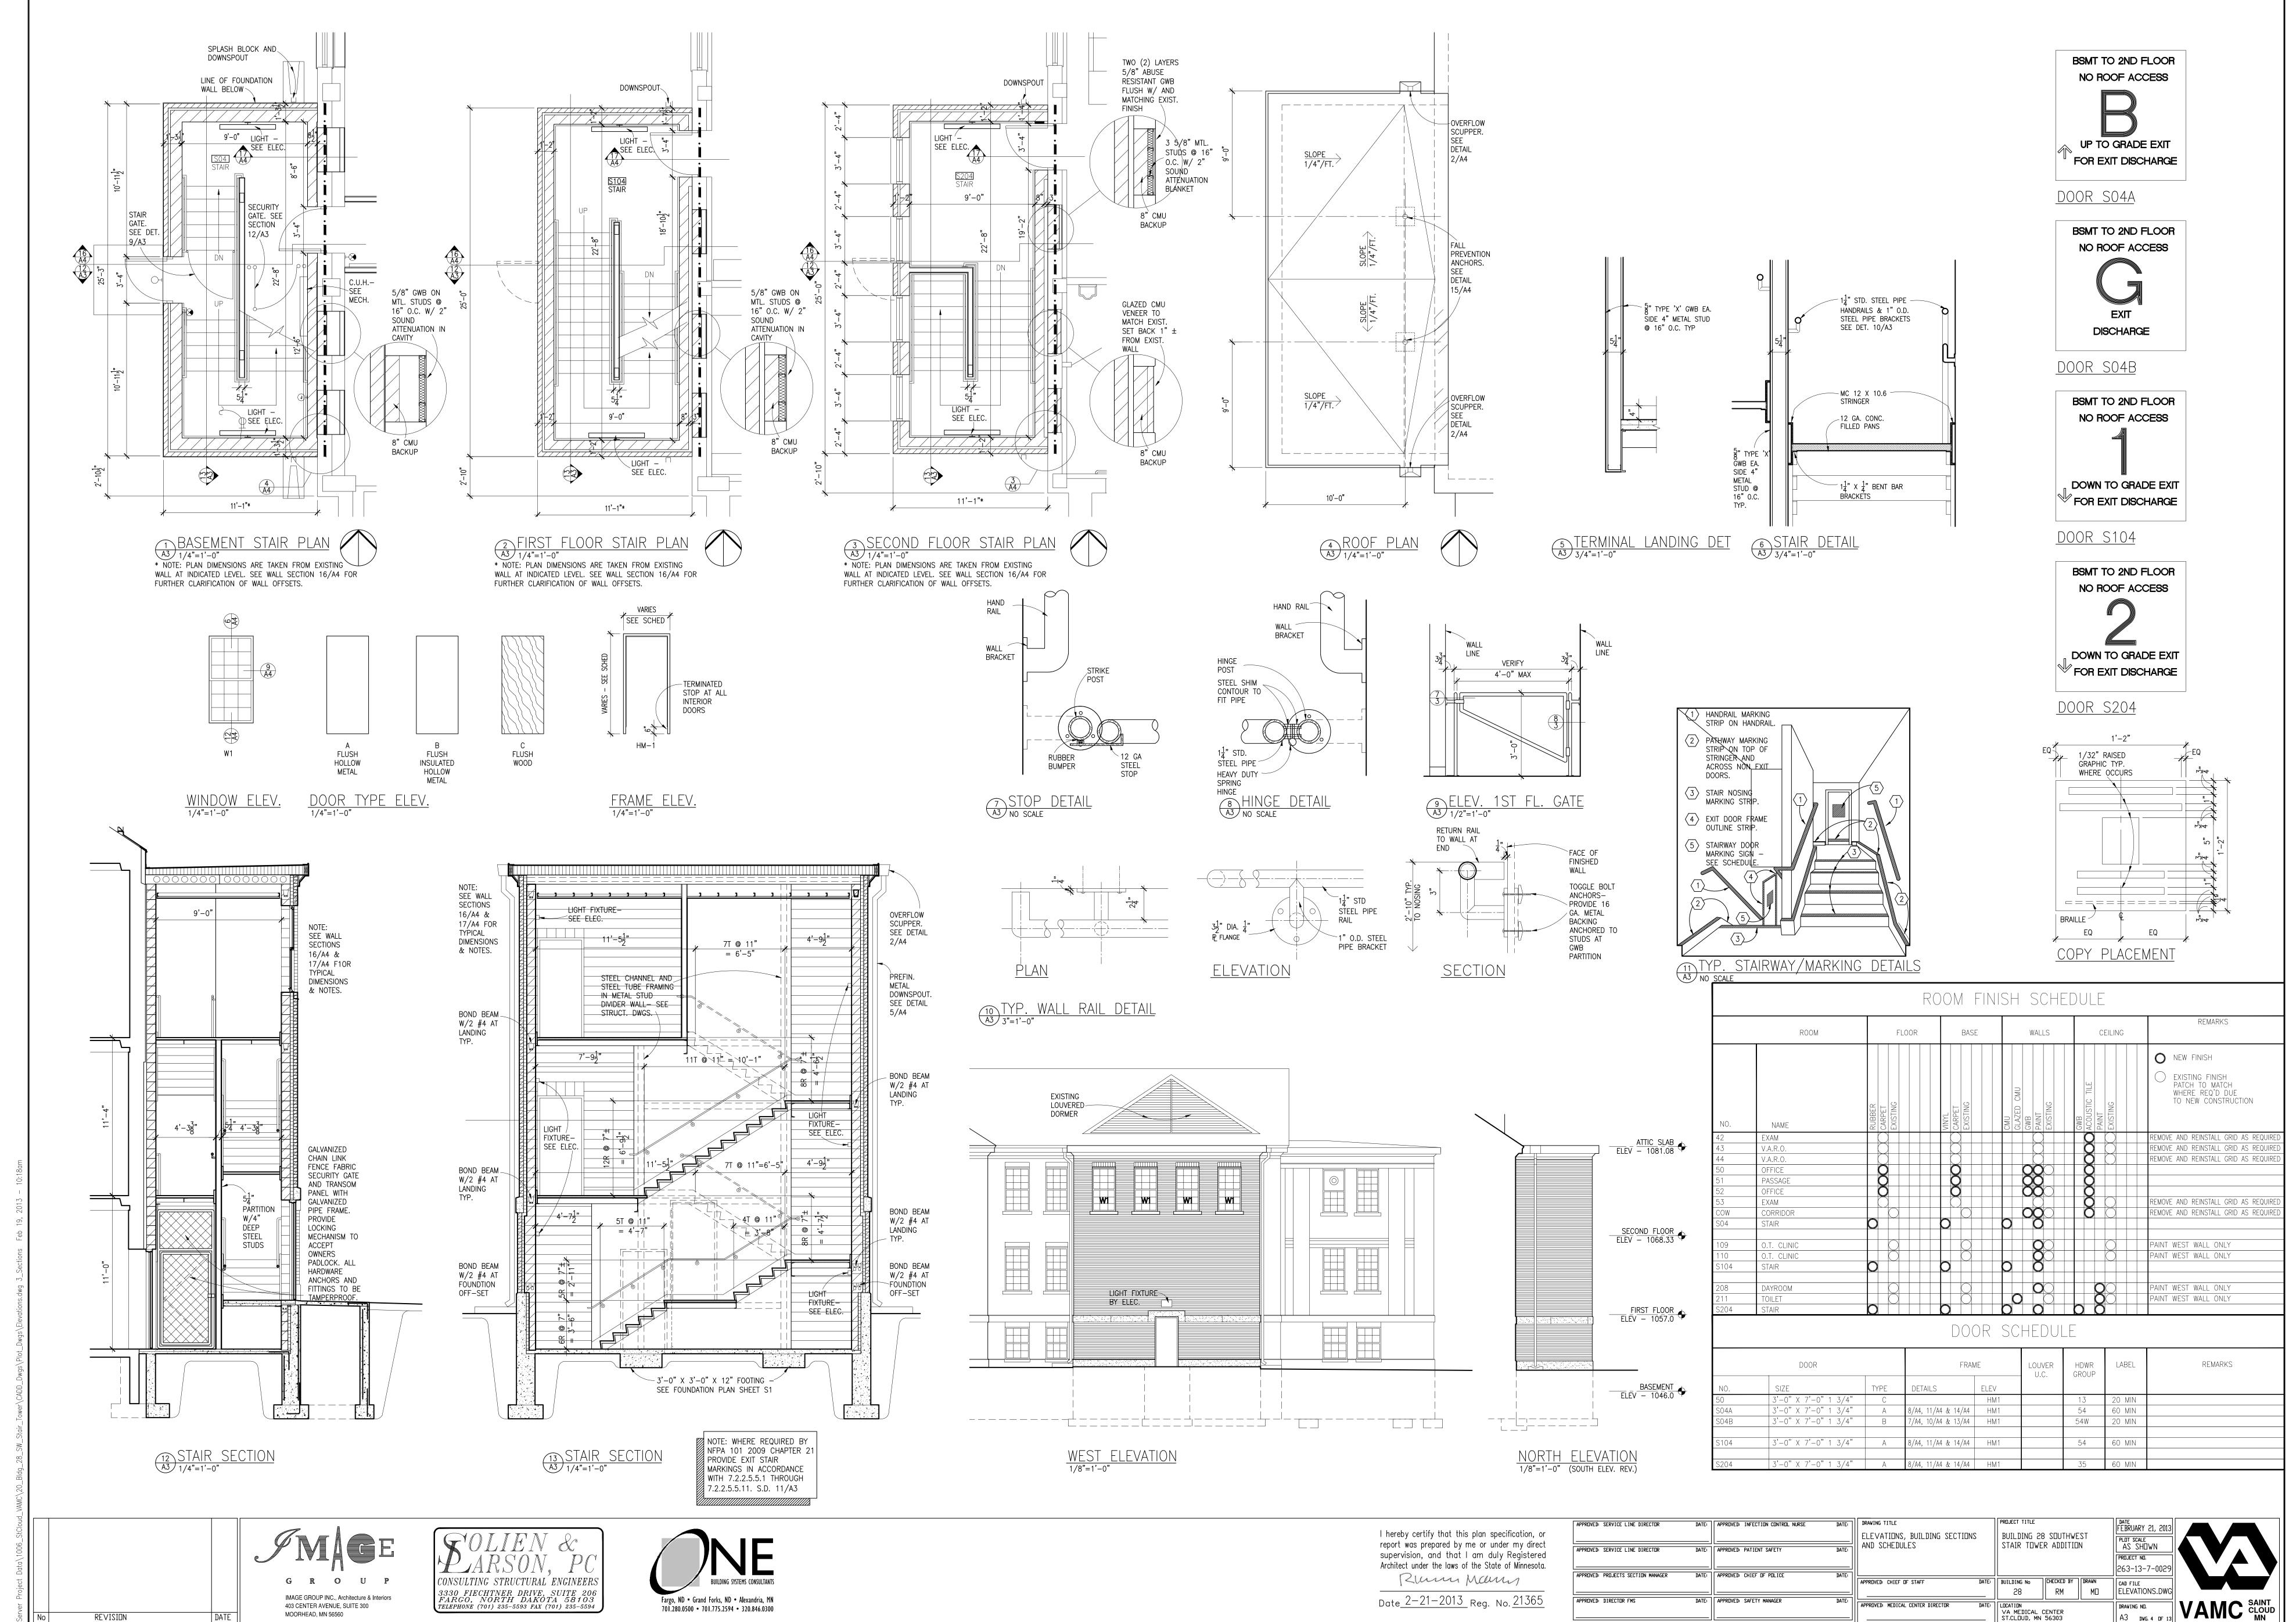

701.280.0500 • 701.775.2594 • 320.846.0300

REVISION

MOORHEAD, MN 56560

